


Drawmer



L A 1 2

line distribution amplifier

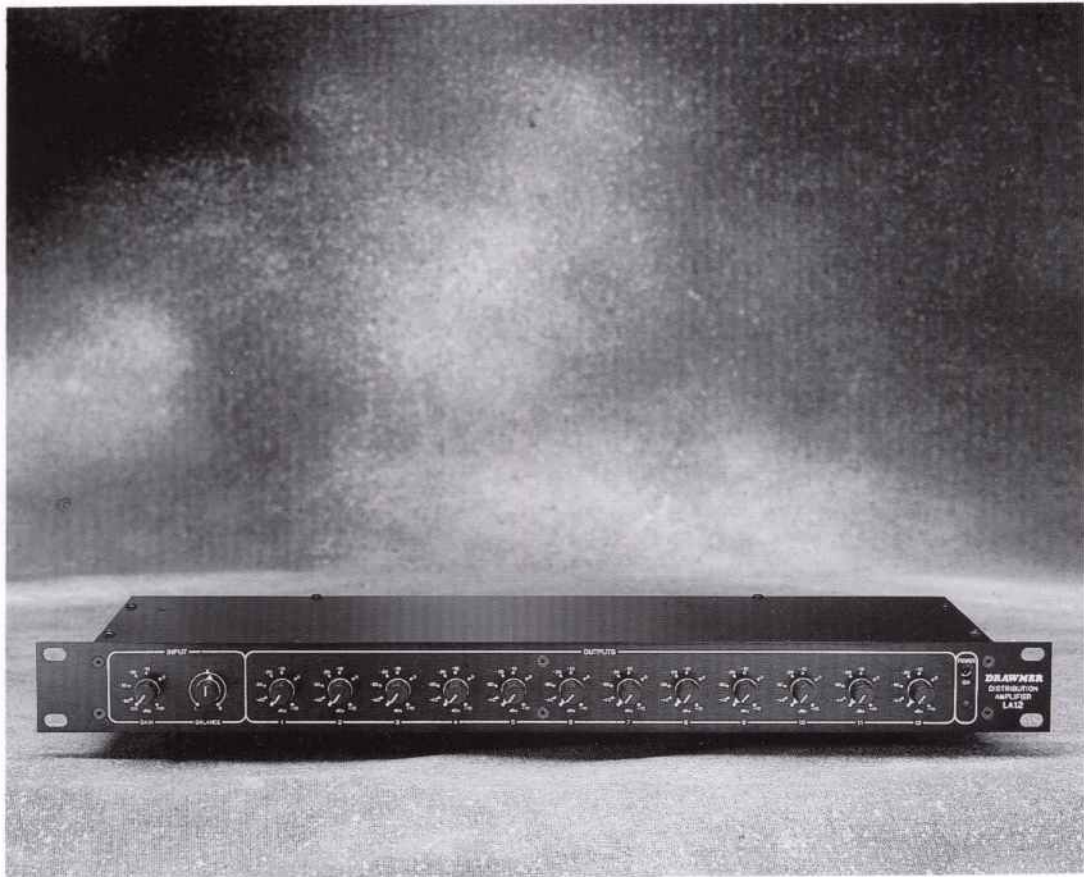

ingenuity (,ɪndʒɪ'nju:ɪti) *n.*, *pl.* **-ties.** 1. inventive talent; cleverness. 2. an ingenious device, act, etc.

Drawmer LA12 LINE DISTRIBUTION AMPLIFIER

The Drawmer LA12 is a low noise low crosstalk distribution amplifier with high bandwidth specification, developed specifically for real time cassette duplication. As more and more facilities invest in this form of tape copying, the LA12 offers the efficient solution to interfacing multiples of real time cassette decks.


The unit provides one stereo input with master "gain" and "balance" controls and twelve stereo outputs, each with individual output level control.

A maximum gain of +20dB is available through the unit which allows a wide range of 'source' and 'destination' equipment to be interfaced.


An auxiliary stereo output which follows the input "gain" and "balance" controls can be linked to the input of a second LA12 if more than twelve stereo outputs are required.

All audio connections are on professional quality phono connectors for ease of installation.

FRONT PANEL

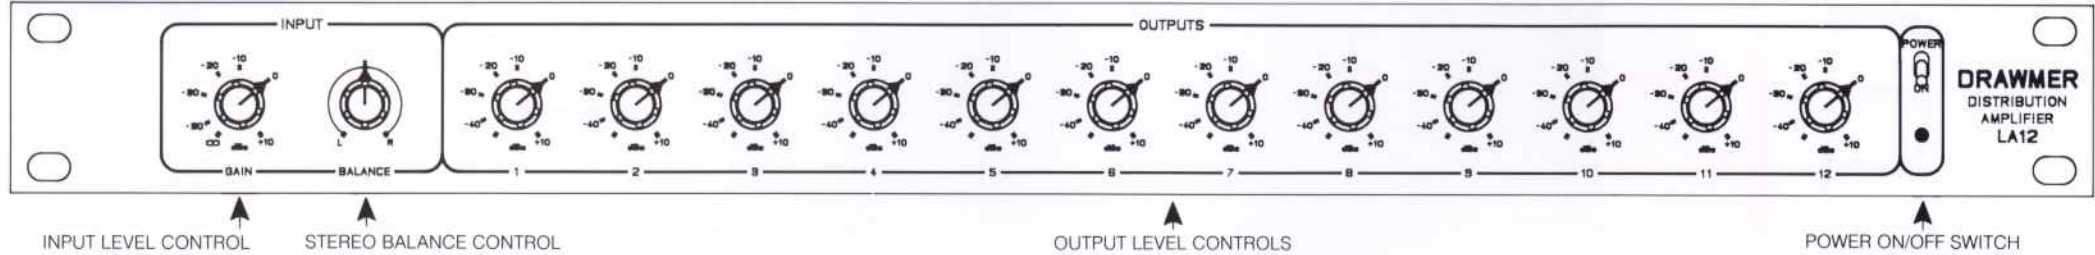


REAR PANEL

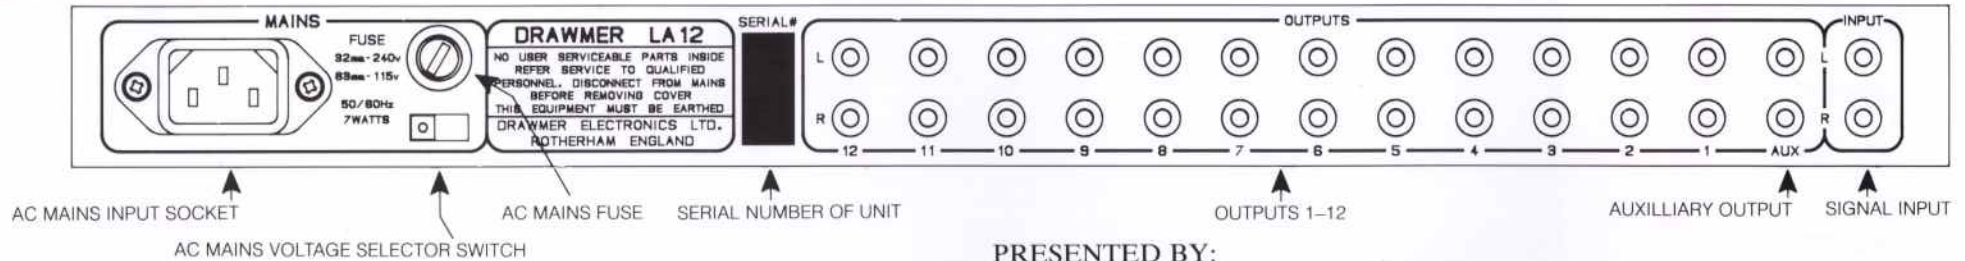

SPECIFICATION

INPUT IMPEDANCE	22K Ω
INPUT GAIN	MAXIMUM +10dBs
OUTPUT GAIN	-40dBs to +10dBs
NOISE (Ref. +4dBv GAIN = 0dB 22Hz to 22Khz)	Better than 100dBs
CROSSTALK (Input Grounded - Any Channel Output)	-67dBs @ 10Khz
DISTORTION	0.008% @ 100Khz 0.015% @ 1K to 10Khz
BANDWIDTH (-1dB)	5Hz to 25KHz

PRESENTED BY:

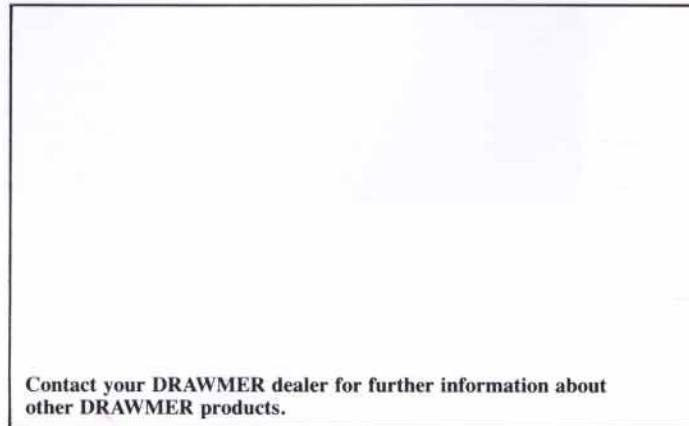

Contact your DRAWMER dealer for further information about other DRAWMER products.

Drawmer

CHARLOTTE STREET BUSINESS CENTRE
CHARLOTTE STREET
WAKEFIELD WEST YORKSHIRE
WF1 1UH ENGLAND

TEL:- 01924 378669
FAX:- 01924 290460

E-Mail: sales@drawmer.co.uk

Web Site: <http://www.proaudio.co.uk/drawmer.htm>